LI-SKT-01 Socket (Lintas)

Features

- Superior Quality Investment-casted Stainless Steel.
- Available in S.S 304(CF8) & S.S 316(CF8M) Grades.
- Precise machining
- Available in BSP / BSPT / NPT Threading as per requirement.
- Pressure Rating PN25,Test Pressure(Hyd.):-30Kg./cm2 (427 psig)
- Working Pressure 25 Kg./cm2 (356 psig)




Suitability

Water, Air, Gas, Oil, Steam

Dimensions

Size	L (mm)	L (Inch)
1/8″	–	–
1/4″	20.90	0.82
3/8″	23.74	0.93
1/2″	28.54	1.12
3/4″	32.80	1.29
1″	–	–
1.1/4″	44.25	1.74
1.1/2″	51.25	2.02
2″	55.75	2.20
2.1/2″	72	2.83
3″	80.5	3.17
4″	93.5	3.68

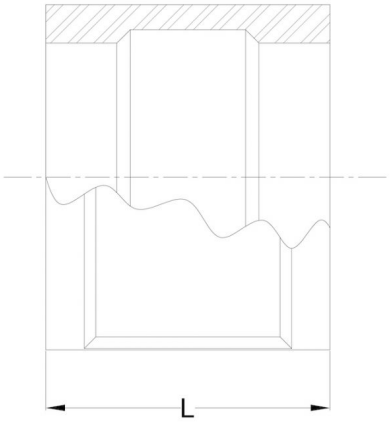

D-117, Focal Point Extension,
Jalandhar 144 012 (Pb.) INDIA

https://www.lintasgroup.com

Phone : +91 181 2602657, 2601607
Email : info@lintasgroup.com