LI-HEX-01 Hex Nipple (Lintas)

Features

- Superior Quality Investment-casted Stainless Steel.
- Available in S.S 304(CF8) & S.S 316(CF8M) Grades.
- Precise machining
- Available in BSP / BSPT / NPT Threading as per requirement.
- Pressure Rating PN25,Test Pressure(Hyd.):-30Kg./cm2 (427 psig)
- Working Pressure 25 Kg./cm2 (356 psig)




Suitability

Water, Air, Gas, Oil, Steam

Dimensions

Size	L (mm)	L (Inch)	S (mm)	S (Inch)
1/8″	–	–	–	–
1/4″	34.00	1.34	16.80	0.66
3/8″	36.00	1.42	19.50	0.77
1/2″	44.30	1.44	23.70	0.93
3/4″	48.50	1.91	28.70	1.13
1″	52.50	2.07	35.50	0.40
1.1/4″	58.00	2.28	46.00	1.81
1.1/2″	62.80	2.47	51.00	2.00
2″	66.50	2.62	62.70	2.47
2.1/2″	73	2.87	80	3.15
3″	86	3.39	94	3.70
4″	90.5	3.56	120	4.72

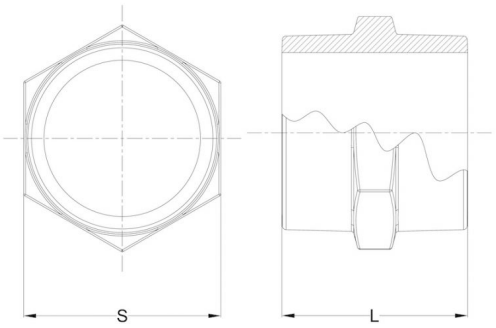

D-117, Focal Point Extension,
Jalandhar 144 012 (Pb.) INDIA

https://www.lintasgroup.com

Phone : +91 181 2602657, 2601607
Email : info@lintasgroup.com