LI-EUN-01 Elbow Union F/F (Lintas)

Features

- Superior Quality Investment-casted Stainless Steel.
- Available in S.S 304(CF8) & S.S 316(CF8M) Grades.
- Precise machining
- Available in BSP / BSPT / NPT Threading as per requirement.
- Pressure Rating PN25,Test Pressure(Hyd.):-30Kg./cm2 (427 psig)
- Working Pressure 25 Kg./cm2 (356 psig)




Suitability

Water, Air, Gas, Oil, Steam

Dimensions

Size	A (mm)	A (Inch)	B (mm)	B (Inch)	C (mm)	C (Inch)	D (mm)	D (Inch)
1/4″	–	–	–	–	–	–	–	–
3/8″	22.10	0.87	50.90	2.00	22.80	0.89	36.30	1.44
1/2″	27.70	1.09	58.70	2.31	27.30	1.07	41.00	1.61
3/4″	31.70	1.25	62.70	2.46	32.30	1.27	49.50	1.95
1″	36.40	1.43	70.30	2.77	40.60	1.61	58.00	2.28
1.1/4″	43.80	1.72	77.00	3.03	49.30	1.94	68.30	2.69

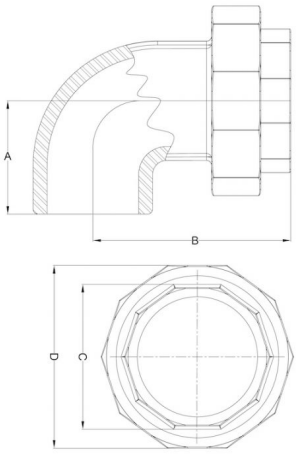

D-117, Focal Point Extension,
Jalandhar 144 012 (Pb.) INDIA

https://www.lintasgroup.com

Phone : +91 181 2602657, 2601607
Email : info@lintasgroup.com