LI-BV-01-SE Stainless Steel 304 Ball Valve Heavy Duty (Lintas)

Features

- Screwed female ends, available in BSPP,BSPT & NPT Threading standards
- Stainless steel Investment casting, full bore blow-off proof stem with Stainless Steel Ball, Teflon Seat & Seal
- Lockable design for various LOTO Applications
- Design Standard: MSS SP – 110
- Pressure/Class Rating: 1000 WOG
- Testing Standard -API – 598/BS-6755 Part – 1



Suitability


Water, Air, Gas, Oil, Steam

Materials of Construction

Part Name	Specifications / Material	Qty
Body	SS:304	1
Connector	SS:304	1
Ball	SS:304	1
Stem	SS:304	1
Gland Nut	SS:304	1
Lever	SS:202	1
Seat / Seal	PTFE – ASTM-D-4894 (VIRGIN)	5

Dimensions

Size (mm)	A	B	C ≈
08	1/4″ BSP/NPT	54	50.00
10	3/8″ BSP/NPT	54	50.00
15	1/2″ BSP/NPT	61.00	56.50
20	3/4″ BSP/NPT	74.00	64.00
25	1″ BSP/NPT	85.00	71.50
32	1.1/4″ BSP/NPT	95.00	73.50
40	1.1/2″ BSP/NPT	110	88.00
50	2″ BSP/NPT	125.00	94.50
65	2-1/2″ BSP/NPT	140.00	122
80	3″ BSP/NPT	171.00	130
100	4″ BSP/NPT	196.00	158

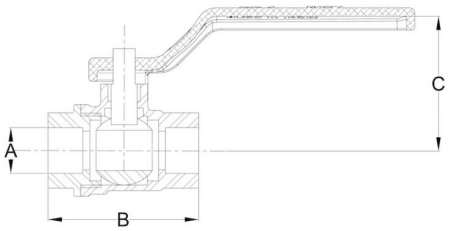

D-117, Focal Point Extension,
Jalandhar 144 012 (Pb.) INDIA

https://www.lintasgroup.com

Phone : +91 181 2602657, 2601607
Email : info@lintasgroup.com