LI-ST-01 Stainless Steel Thermodynamic Steam Trap TD-3 (Lintas)

Features

- Available in Stainless-Steel S.S 304 (CF8)
- Screwed Female Ends to BSP/BSPT/NPT.
- Superior Quality Investment Casting.
- Provided with integral strainer.
- Stainless Steel (S.S 304) perforated sheet screen for trouble-free service.
- Mirror finished moving disc.



I.B.R

Pressure Ratings:
• Shell: 51 Bar(740 psig)
• Maximum operating pressure: 42 Bar (600 psig / 42.8 kg/cm2)
• Maximum allowable temperature: 425°C
• Maximum operating temperature: 400°C

Suitability


Steam

Materials of Construction

Part Name	Specifications / Material	Qty
Body	SS:304	1
Cover	SS:304	1
Disc	SS:304	1
Screen	SS:304	1
Plug	SS:304	1

Dimensions

Size (mm)	End to End (B)	Size (A)
15	80.00	1/2″
20	80.00	3/4″
25	89.00	1″

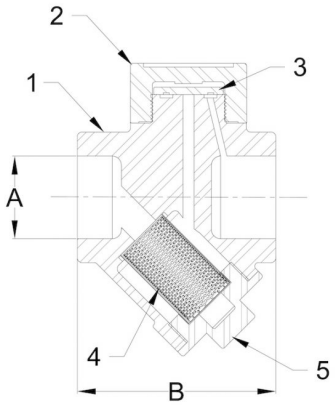

D-117, Focal Point Extension,
Jalandhar 144 012 (Pb.) INDIA

https://www.lintasgroup.com

Phone : +91 181 2602657, 2601607
Email : info@lintasgroup.com