LI-YSTR-01 Lintas Stainless Steel Y-Type Strainer (Lintas)

Features

- Superior Quality Stainless-Steel Investment Casting
- Full Metal In-House Construction for a long and trouble-free life
- Stainless Steel (S.S 304/316) perforated sheet screen is guided in body and bonnet.
- Double-Mesh Filter is available on request
- Fine finish and smooth contours to minimize pressure drop inside the strainer.
- A large screening area makes the strainer highly efficient in performance.



Testing pressure: 25 Kg/cm
Maximum Permissible Temperature: 225 C

Suitability


Water, Air, Gas, Oil, Steam

Materials of Construction

Part Name	Specifications / Material	Qty
Body	SS 304(CF8) / SS 316 (CF8M)	1
Plug	SS 304(CF8) / SS 316 (CF8M)	1
Screen	SS 304(CF8) / SS 316 (CF8M)	1
Ring	VIRGIN PTFE	1

Dimensions

Size (DN) mm	(A) End to End ±1.00 mm	Size (NPS)
15	64	1/2″
20	80	3/4″
25	85	1″
32	104	1.1/4″
40	117	1.1/2″
50	138	2″

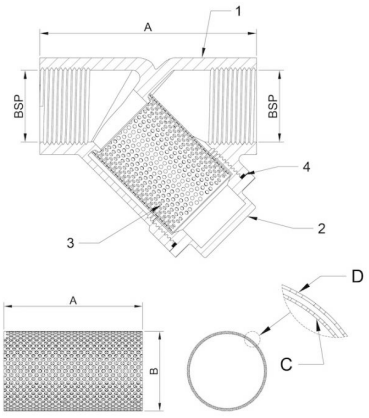

D-117, Focal Point Extension,
Jalandhar 144 012 (Pb.) INDIA

https://www.lintasgroup.com

Phone : +91 181 2602657, 2601607
Email : info@lintasgroup.com